


Prefabricated Valve Sets

The components of the valve sets serving coils in air handling units are generally standard with varying pipe diameters and control valve sizes. Typical construction drawings were produced for each line size to allow specific quantities to be manufactured.

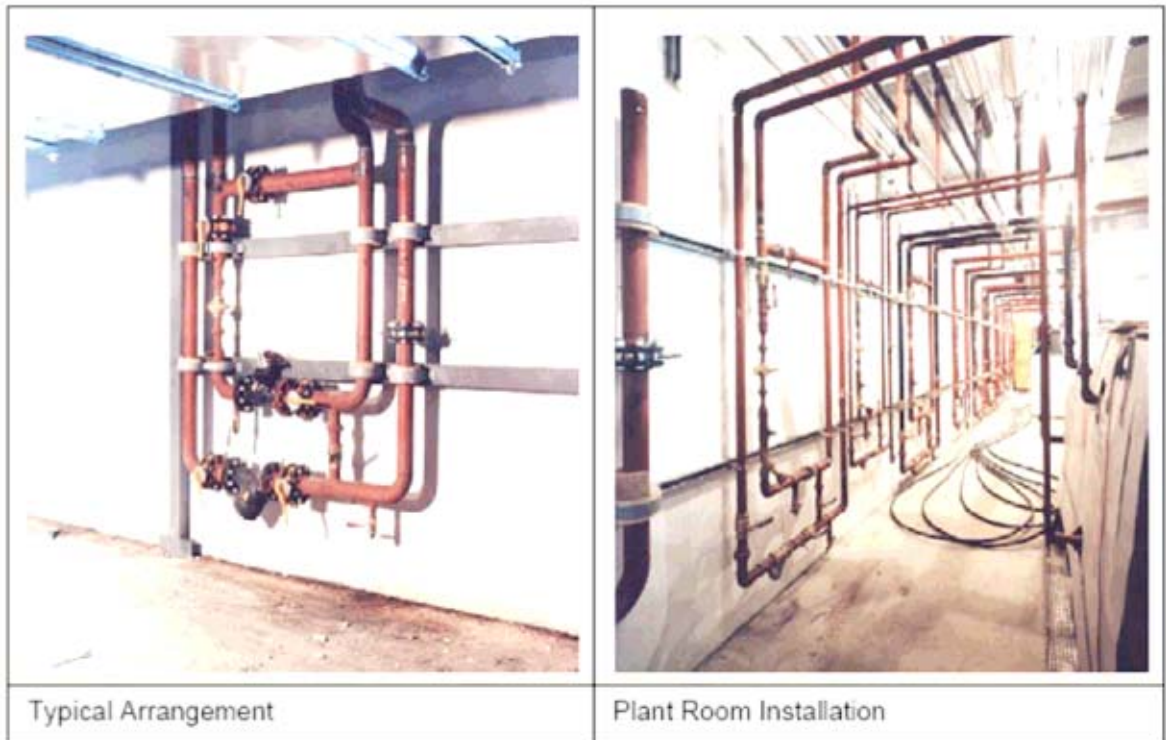

- Prefabrication took place off site reducing general hazards.
- Other activities could be undertaken in the plant room whilst these were being fabricated off site resulting in benefits to the construction programme.
- By standardising the arrangements, this provides a neat and spacing saving solution.
- All valves are easily accessible for commissioning and for future maintenance work.
- Fabrication drawings could be used for future projects.

Julian Williams Tel: 01457 854341